



SF

CHAINSTITCH-INTER LOCK  
7500


MODEL

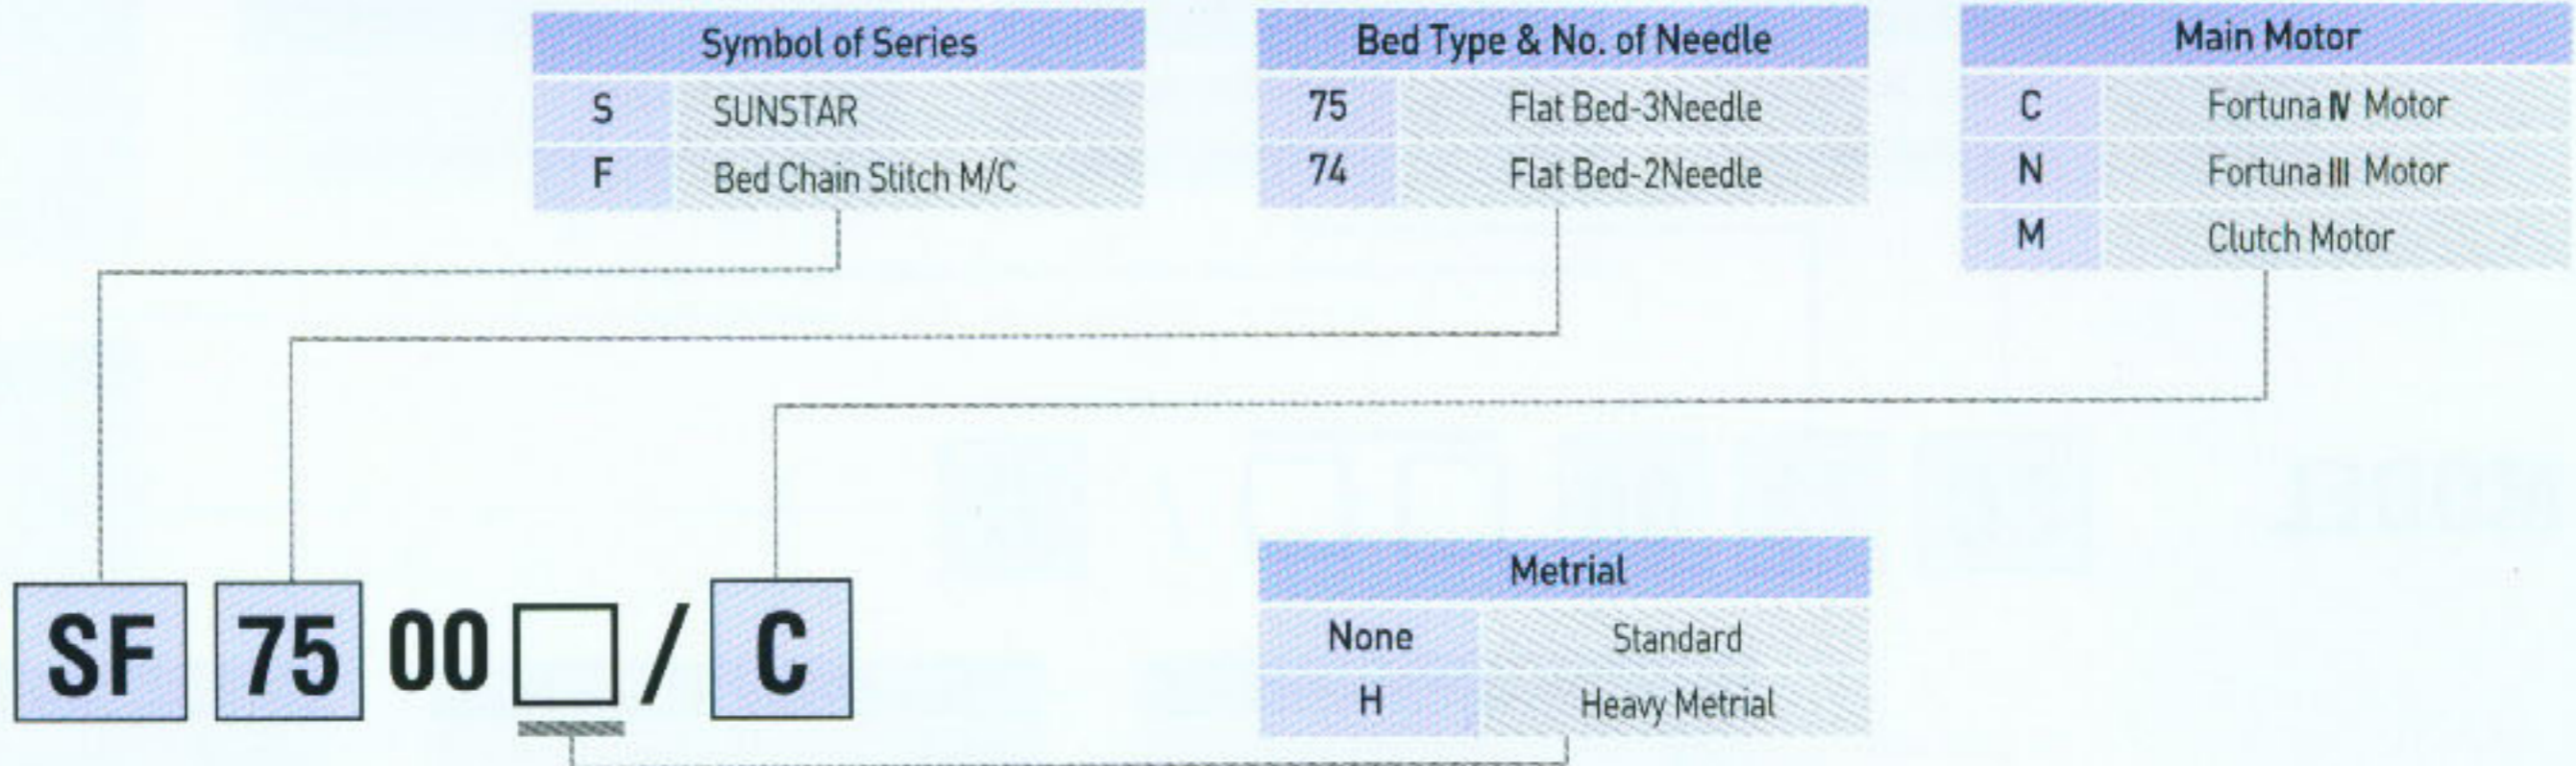

SPEC.

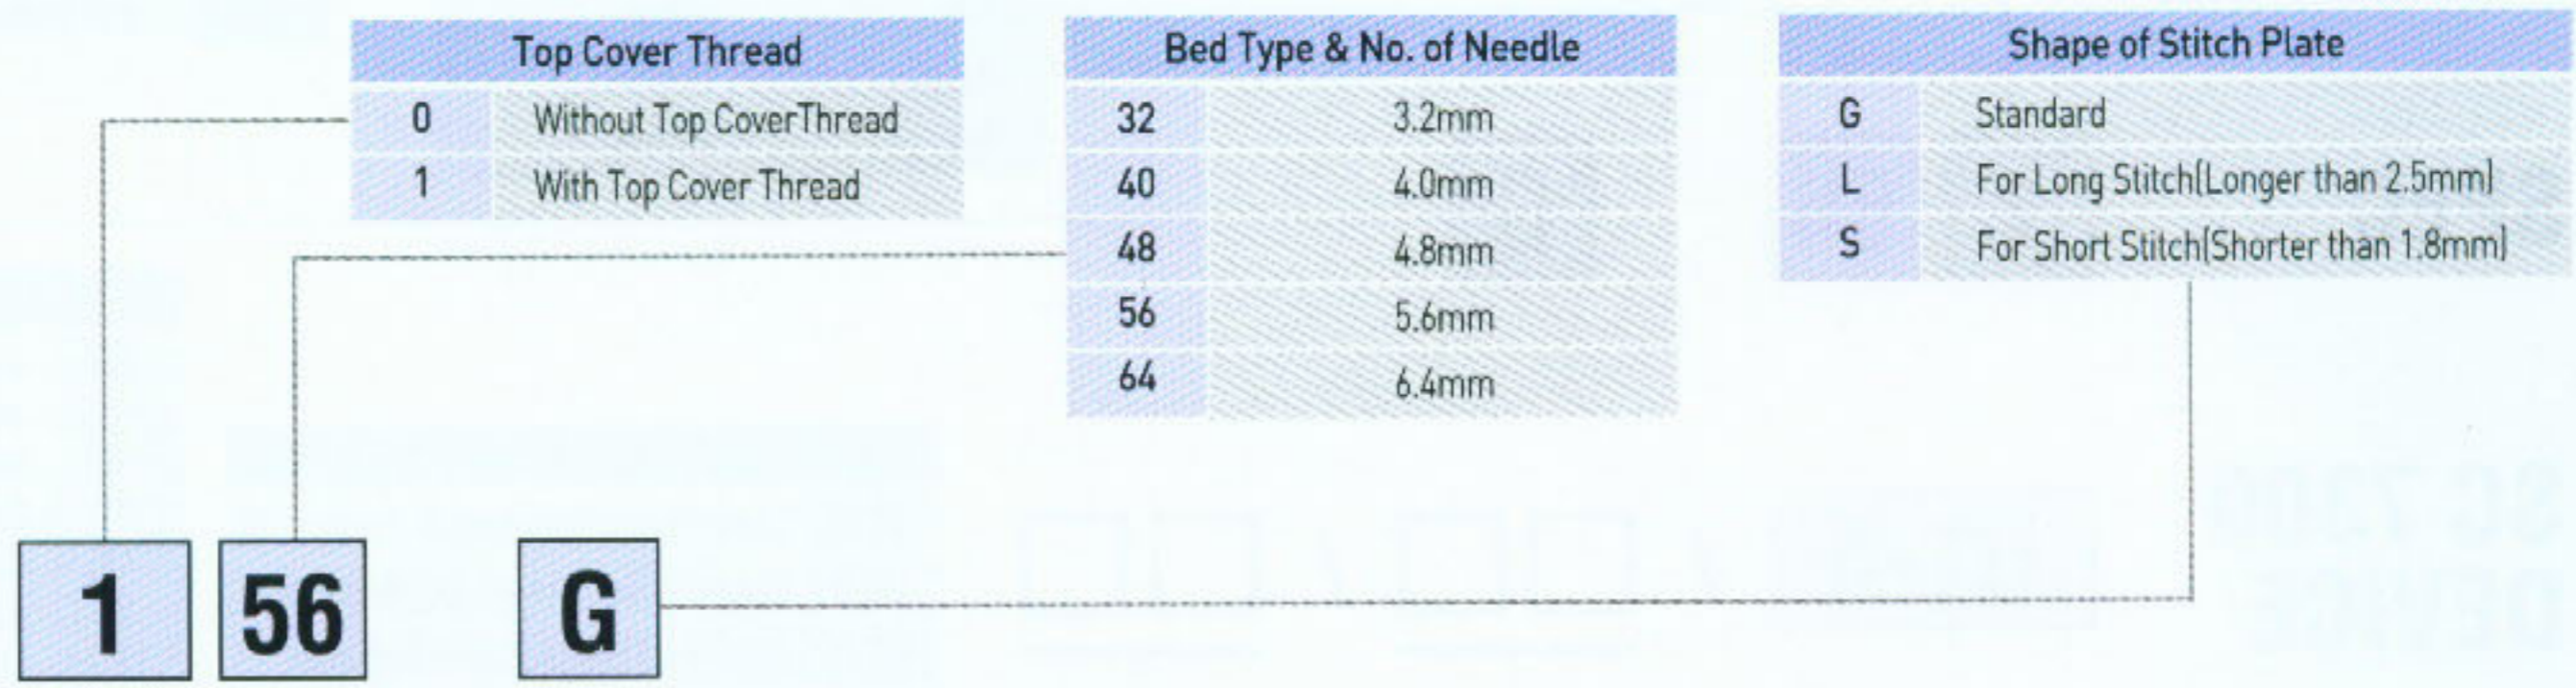

DEVICE

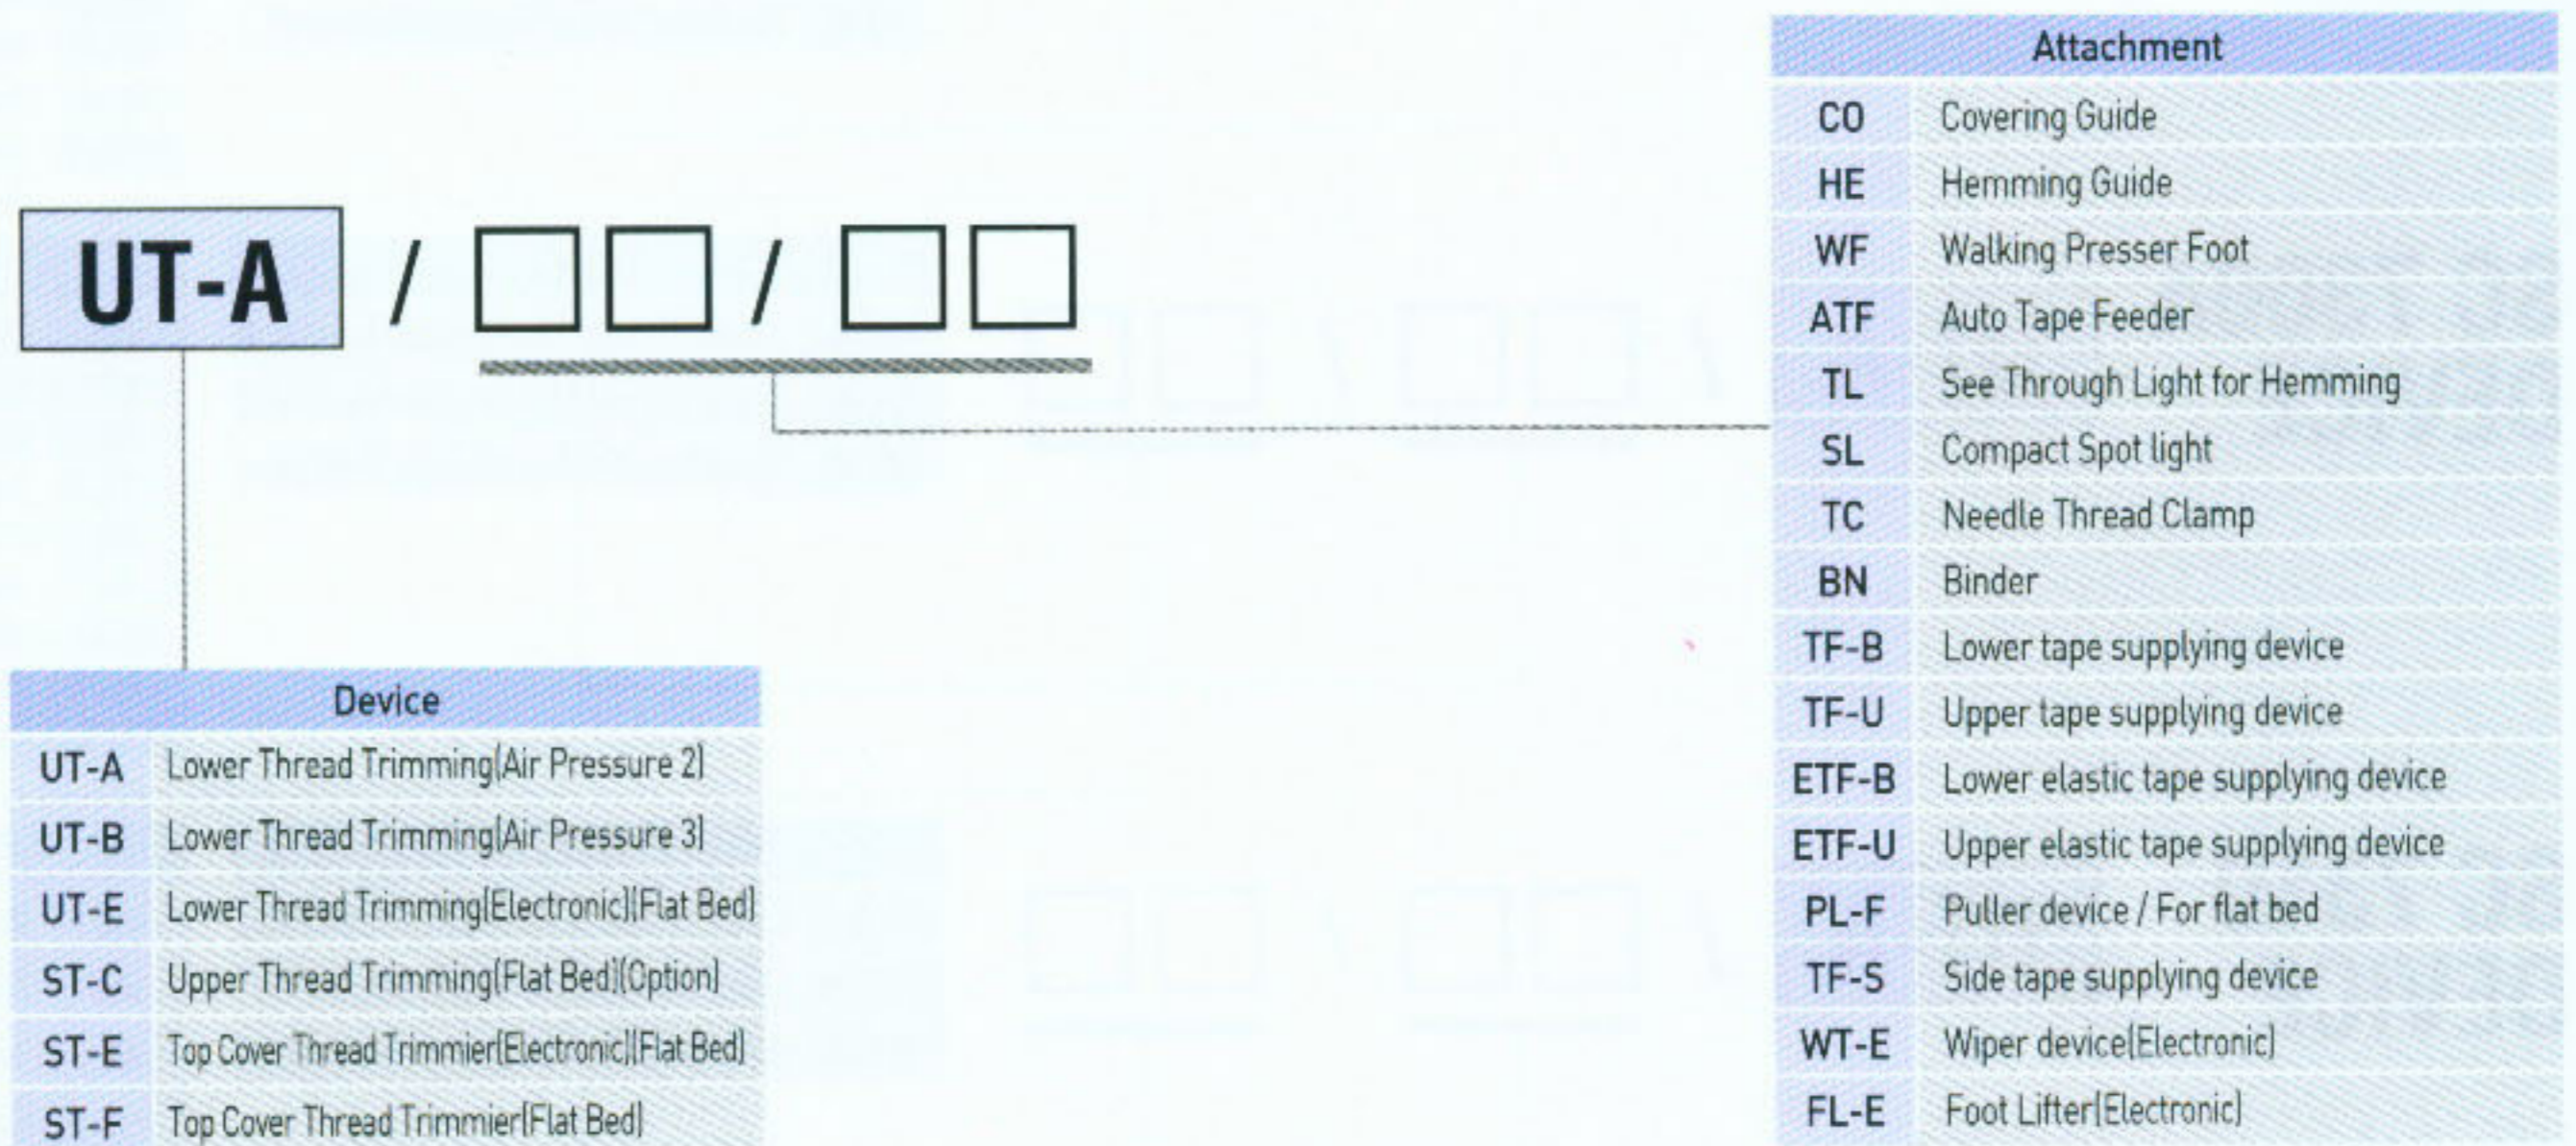

SF 7500

■ Specification

Application	General sewing for knit	
Max. Sewing Speed(spm)	6,000 spm (for intermittent sewing)	
Max. Stitch Length	1.4~3.6 mm	
Needle	UY 128GAS #65 - #90	
Thread Take-up lever stroke	2-needle	3.2, 4.0, 4.8, 5.6, 6.4 mm
	3-needle	31 mm 5.6, 6.4 mm
Lift of the Presser Foot	Max. 8 mm (when Top cover thread is used, up to 7 mm)	
Stitch Type	ISO 406, 407, 602, 605	
Free Regulation	By Push Button	1:2
Differential	Max. Normal Differential Ratio	1:0.7
	Max. Revers Differential Ratio	
Lubrication	Automatic lubrication	