


Needle works denote beautiful stories.....

NEW

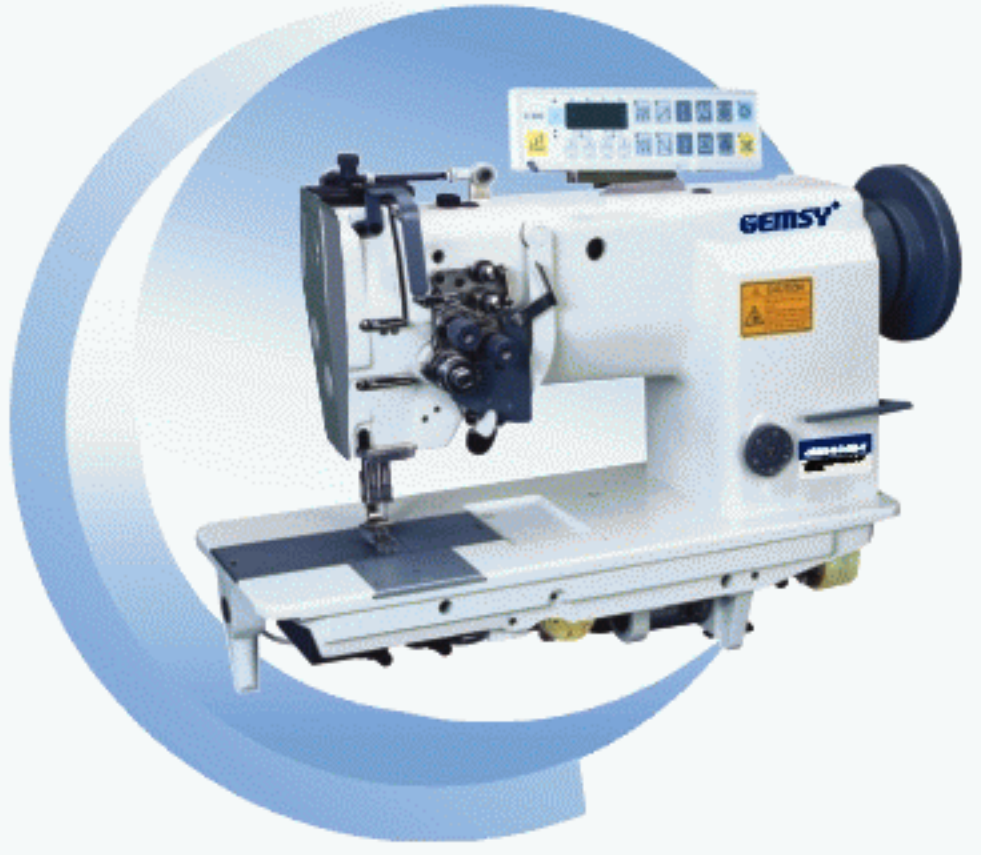

GEM2000S-2M-7/2B-7

High-speed double needles lockstitch sewing machine with auto-trimmer(needle bar without oil)

With two straight needles, self-lubricating vertical-axis rotating hook for catching tread loops and sliding cam threadtake-up, self-lubrication produce two lines of lockstitch. Synchronized feeding of needle bar and feed dog assures even stitches and prevents materials being sewn from shifting. Knob-type stitch regulator and lever type reverse feeding mechanism permit convenient operation. The arm shaft and hook shaft are supported by ball bearings. With synchronized tooth belt for driving and plunger pump for lubricating, it is suitable for stitching shirt, overalls, women's underwears, jeans and etc. With auto-trimmer, double-needles, auto-feed clothes, high-speed stitch machine, linear knife support and stable tangent. Applied new-type sewing machine computerized control system, which can realize the automatically settle the needle position and the number of the needle, and converse sewing as well as multi-program sewing functions.

Model:	GEM2000S-2M-7/2B-7		
Usage:	Heavy-weight materials	needle: DP*5 18#	
Highest sewing speed:	3000RPM	Hook: self-lubrication, auto-trimmer Small hook	
Stitch length:	33.4MM	Lubricate mode: Auto Lubrication	
Height of presser:	1. man-power 7MM	Needle gauge:	
	2. Knee control 13MM	standard 6.4	special: 3.2, 4.8, 8, 9.5, 12.7



Auto thread-take Manual backstitch sewing device

GEM2000S-1M/1B

High-speed double needle lockstitch sewing machine

With two straight needles, self-lubricating vertical-axis rotating hook for catching tread loops and sliding cam threadtake-up, self-lubrication produce two lines of lockstitch. Synchronized feeding of needle bar and feed dog assures even stitches and prevents materials being sewn from shifting. Knob-type stitch regulator and lever type reverse feeding mechanism permit convenient operation. The arm shaft and hook shaft are supported by ball bearings. With synchronized tooth belt for driving and plunger pump for lubricating, it is suitable for stitching shirt, overalls, women's underwears, jeans and etc.

GEM2000S-1M	★	--	--	33.4	4	7/13	DP×8#11-14	4000	370	700×285×85	39/49
GEM2000S-1B	★	--	--	36	7	7/13	DP×8#16-22	3000	370	700×285×85	39/49
GEM2000S-1M/1B				6.4/2.4/3.2/4.8/5.6/8/9.5/12.7/16/19/25.4/28.6/32/38							



GEM2000S-2M/B


Double needles lockstitch sewing machine (split needle bar)series

With two straight needles, self-lubricating vertical-axis rotating hook for catching tread loops and sliding cam threadtake-up, self-lubrication produce two lines of lockstitch. Needle bar adopts mechanized split structure, suitable for corner-sewing and convenient for repairing seam. Top and bottom shaft use running needle to support, synchronized dentate-type band to transit. Synchronized feed by needle and feed dog can prevent the material from slipping, knob-type regulator adjusting guage, lever-type forward and reverse feeding mechanism made operation more convenient and easy, suitable for sewing shirt, uniform, underwears and jean and etc.

GEM2000S-2M	★	--	--	33.4	5	7/13	DP×8#11-14	3500	370	700×285×85	39/49
GEM2000S-2B	★	--	--	33.4	7	7/13	DP×8#19-22	3000	370	700×285×85	39/49
				6.4/3.2/4.8/8/9.5/12.7							



NEW

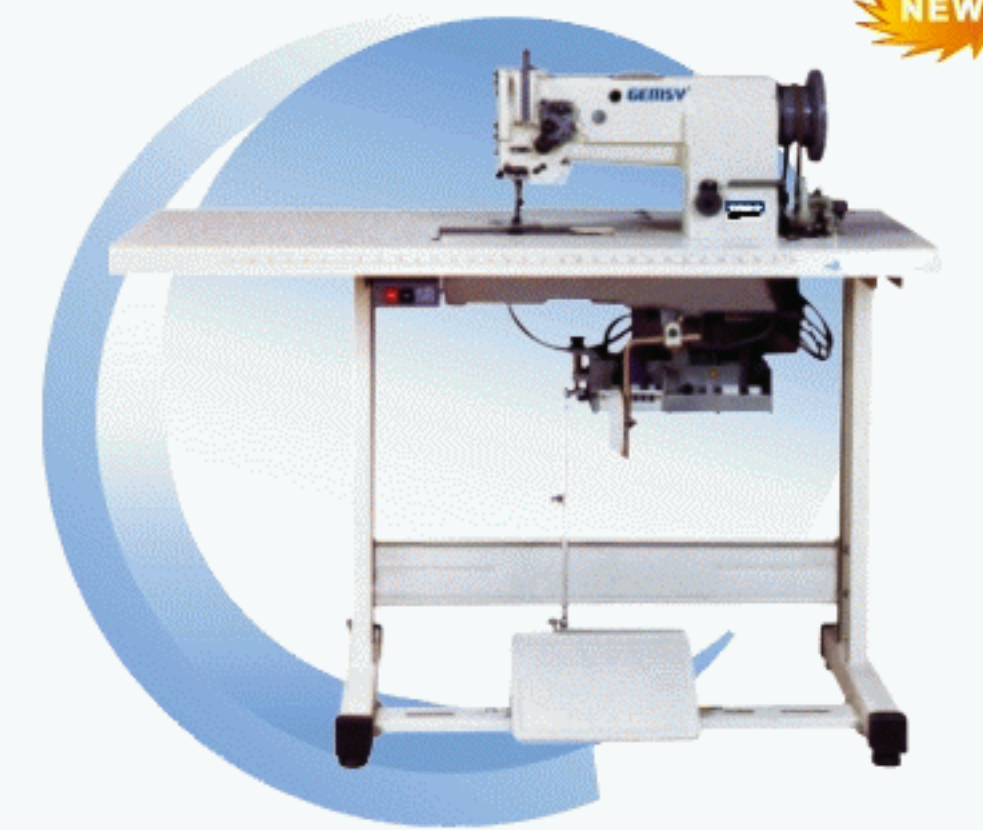


GEM-82440-1D


Single needle, auto-trimmer compound feed heavy weight lockstitch sewing machine

Suit for the leather and canvas product, such as the handbag, luggage, car cushion and sofa etc. SPECIAL FEATURES: Adopt new style automatic thread trimming mechanism, perfect the trimming effect, so improve the work efficiency. Adopt huge standing hook, taking up thread by slide lever, driving by synchronous tooth-belt. Adopt the combination of needle lever, presser foot and feed teeth to feed material in synchronization. Equip with safety clutch device. Low noise, wearing well.

SYNCHRONIZATION.	
Max. Sewing speed	2000 S.P.M
Max. Sttch length	9MM
Presser foot lift	8MM with hand lever 14MM with knee lever
Needle bar stroke	30MM
Take-up lever stroke	74.5MM
Needle system	DP*17
Needle space	3.2MM 4.8MM 8 MM 9.5MM
Lubricating mode	Automatic lubricate
Hook	Huge standing, automatic lubricate, for trimming

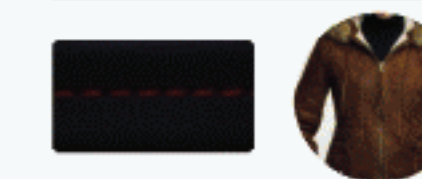

NEW

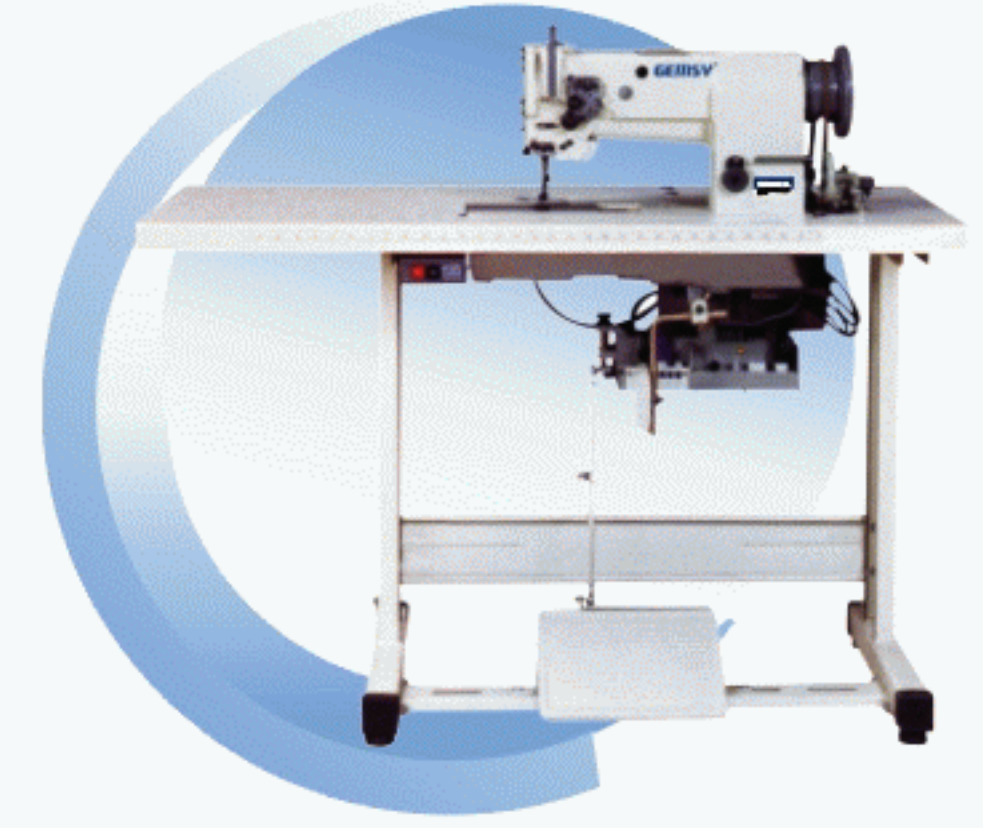


GEM-82440-2D

Double needles, auto-trimmer compound feed heavy weight lockstitch sewing machine

Suit for the leather and canvas product, such as the handbag, luggage, car cushion and sofa etc. SPECIAL FEATURES: Adopt new style automatic thread trimming mechanism, perfect the trimming effect, so improve the work efficiency. Adopt huge standing hook, taking up thread by slide lever, driving by synchronous tooth-belt. Adopt the combination of needle lever, presser foot and feed teeth to feed material in synchronization. Equip with safety clutch device. Low noise, wearing well.

SYNCHRONIZATION.	
Max. Sewing speed	2000 S.P.M
Max. Sttch length	9MM
Presser foot lift	8MM with hand lever 14MM with knee lever
Needle bar stroke	30MM
Take-up lever stroke	74.5MM
Needle system	DP*17
Needle space	3.2MM 4.8MM 8 MM 9.5MM
Lubricating mode	Automatic lubricate
Hook	Huge standing, automatic lubricate, for trimming

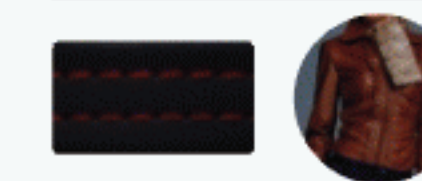


NEW



GEM-82440-1

Single needle, compound feed heavy weight lockstitch sewing machine

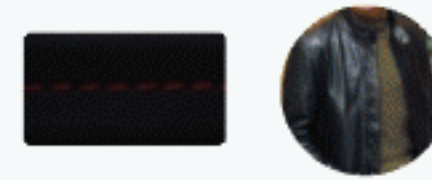

NEW



GEM-82440-2

Double needles, compound feed heavy weight lockstitch sewing machine

